


ASSEMBLY & INSTALLATION INSTRUCTIONS

A627

Dahlia Mini Pendant 184350

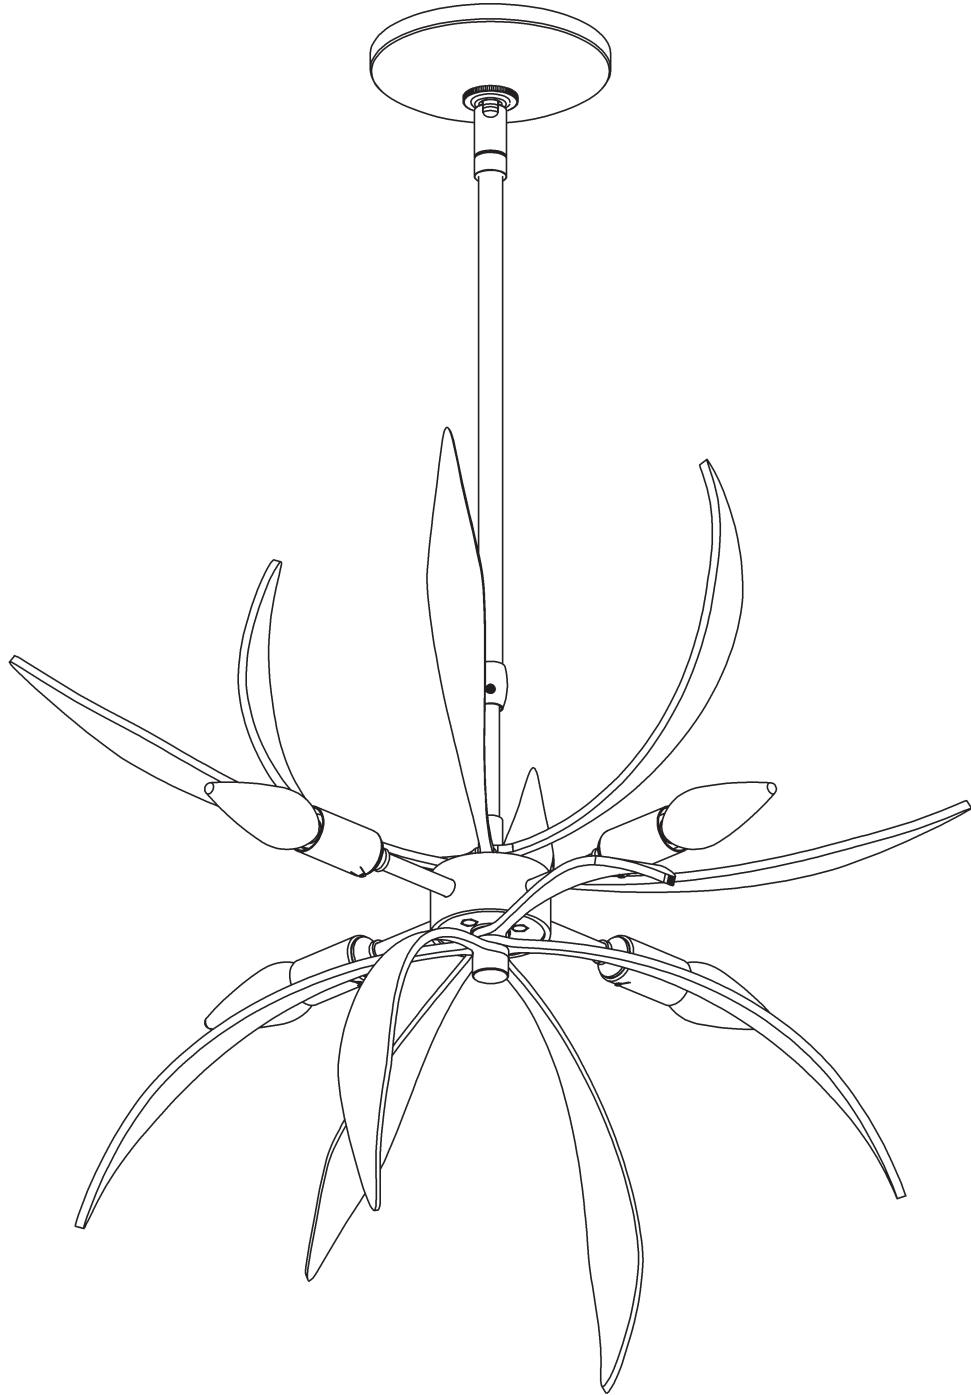

Component Parts

- A Center Socket Assembly**
- B Decorative Assembly**
- C Washer**
- D Stud**
- E Cap**
- F Crossbar**
- G Nipple**
- H Jam Nut**
- I Fixture**
- J Fixture Coupling**
- K Fixture Pipe**
- L Canopy**
- M Canopy Ring**
- N Canopy Pipe Assembly**
- O Clutch**
- P Set Screw**
- Q Plastic Sleeve**
- R Ground Screw**
- S Socket**



Dahlia Mini Pendant 184350

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Assemble Fixture (Figure 1)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack fixture from the carton.
2. Locate decorative assembly (B) and center socket assembly (A).
3. Cap (E) is shipped installed on stud (D). Remove and set aside for later use.
4. Slide washer (C) found in kit bag over stud (D) followed by decorative assembly (B).
5. Apply a drop of the supplied thread locking compound to the internal threads of the cap (E).
Note: Application of the thread locking compound is necessary to prevent the parts from loosening during regular maintenance and cleaning of the fixture. Be certain to apply the compound.
6. Secure with cap (E).
Note: Decorative assembly (B) will still be able to spin to desired orientation.
7. Follow steps on next page to install fixture.

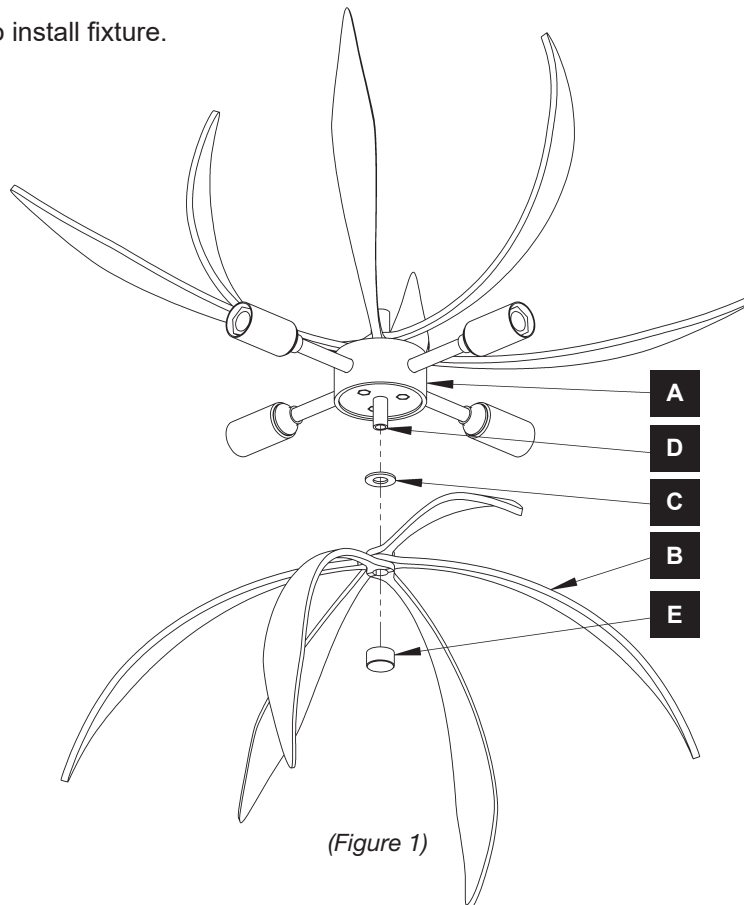

ASSEMBLY & INSTALLATION INSTRUCTIONS

A627

Dahlia Mini Pendant 184350

To Install Fixture (Figure 1)

1. Thread jam nut (H) and crossbar (F) onto threaded nipple (G). Leave parts loose. Threaded nipple is attached to canopy pipe assembly (N).

2. Using two machine screws (not provided), temporarily fasten crossbar (F) to the electric box.

Note: A new electric box comes with screws. When replacing a fixture, retain existing screws for use with new fixture.

3. Adjust length of threaded nipple (G) in crossbar (F) so canopy ring (M) will hold canopy (L) against the ceiling with no threads showing for best appearance. When the correct adjustment is established, tighten jam nut (H) against crossbar to hold adjustment.

4. Remove crossbar (F) from electrical box and proceed with assembly instructions.

5. Locate fixture pipe (K) and slip it over the wires coming from fixture.

6. Apply a drop of the supplied thread locking compound to the internal threads of fixture coupling (J) and screw fixture pipe (K) into fixture coupling, being careful not to twist the wires.

Note: Application of the thread locking compound is necessary to prevent the stem from loosening during regular maintenance and cleaning of the fixture. Be certain to apply the compound.

7. Carefully slide canopy ring (M) and canopy (L) over fixture pipe (K) until it rests on the fixture. Make sure the smaller diameter side of canopy ring is oriented up.

8. Slide the wires from fixture pipe (K) through canopy pipe assembly (N).

9. Unscrew clutch (O) from canopy pipe assembly (N); slide it across the wires and onto fixture pipe (K). It may be necessary to loosen set screw (P) in the clutch (O). Follow this with plastic sleeve (Q), oriented so the tapered end nests in clutch (O) (Figure 2).

10. Slide the fixture pipe (K) into the canopy pipe assembly (N) as far as necessary to give you the total length of the fixture which you desire. Be careful not to scratch the pipe surface and to pull excess wire up through the canopy pipe assembly (N). There must be a minimum 1-1/2" of inner pipe inside the outer pipe.

11. Tighten set screw (P) in clutch (O) firmly with hex wrench provided.

12. Using two machine screws (not provided), fasten the crossbar (F) to the electric box.

13. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black). Attach a pigtail lead to the crossbar ground screw (R). Holding canopy (L) close to the ceiling connect all ground wires (bare copper or green to bare copper or green). Push wires back into electrical box.

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY AND NO BARE WIRE IS EXPOSED.

14. Push canopy (L) against ceiling and secure with canopy ring (M).

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN THE CANOPY (E) AND THE CEILING.


15. Install bulbs (not provided) into sockets (S).

16. Restore electricity at main breaker.

ASSEMBLY & INSTALLATION INSTRUCTIONS

A627

Dahlia Mini Pendant 184350

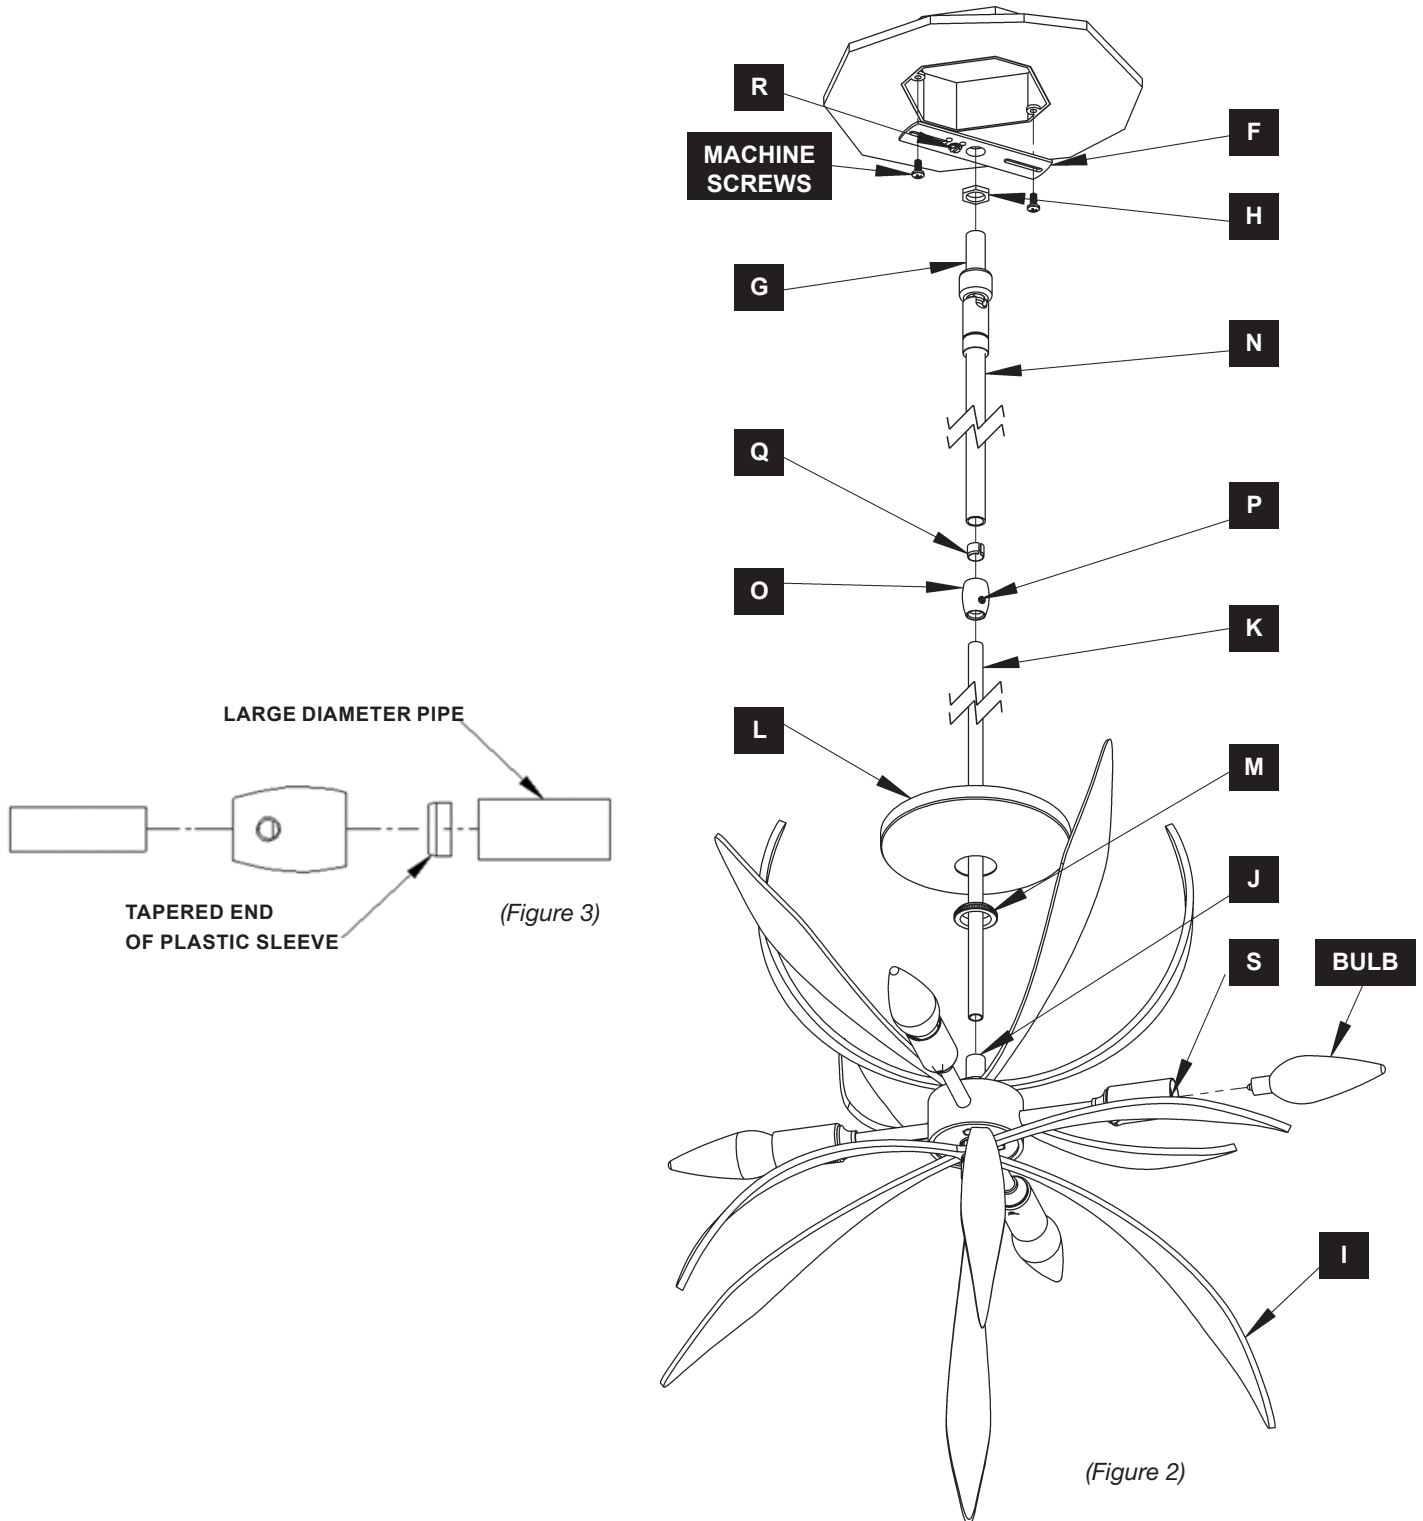

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**