


AKKU-Pack Rechargeable Battery from Limoss

AKKU-PACK rechargeable

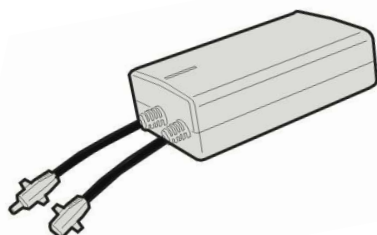

The Limoss AKKU-PACK gives you the ability to place your furniture anywhere you please without the worry of cables or plugins. This revolutionary battery pack is longer lasting and more compact than any other product on the market today. While traditional battery packs are capable of only 25-50 cycles per charge; the Limoss AKKU-PACK can handle up to 300 cycles on a single charge. To simplify the installation and reduce cost, we have also designed this battery pack to be recharged using any existing Limoss transformer. No need to purchase a separate transformer as most battery packs require.

FEATURES	SPECIFICATIONS	CAUTION
• Full battery pack 6-8 Hours • Battery status LED indicator • Low Battery Audible alarm • Up to 300 cycles per charge depending on model • Compatible with any existing Limoss transformer • UL recognized (MH49149)	• Nominal Voltage/Capacity: 25. 2V1800mA • Input Charge Voltage: 24V-32V DC • Max Discharge Current: 5A • Duty Cycle: Max 10%; Max T_{on}: 2min	• Charge battery when Low Battery Alarm sounds or every 3 months to avoid permanent damage to battery • Charge battery with correct input voltage only • For indoor use only

Fjords USA offers its' dealers the opportunity to order rechargeable batteries directly from the manufacturer (Limoss US) for our Power Swing Relaxers. We manufacture direct power swing relaxers that have been wired with the option of installing a rechargeable battery direct from Limoss US. Rechargeable batteries are quite popular with consumers that want to place the chair away from the wall for aesthetic reasons. Pricing is set by Limoss US, and is subject to change. Battery installation IS NOT intended to be a consumer-installed option.

The following contact information is for our dealer's use and not to be distributed to consumers.

Limoss US

Telephone: (662)-365-2200

Email: jw@limoss-us.com

Fax: (662)-365-2205


Website: <http://www.limoss-us.com>

Fjords does not stock or sell batteries for our Power Swing Relaxers.

Installation Rechargeable Battery from Limoss Relax Collection



Disconnect power and wait 10 seconds. Lift up the back skirt on the back. Tilt your recliner on its face if it makes it easier to access.

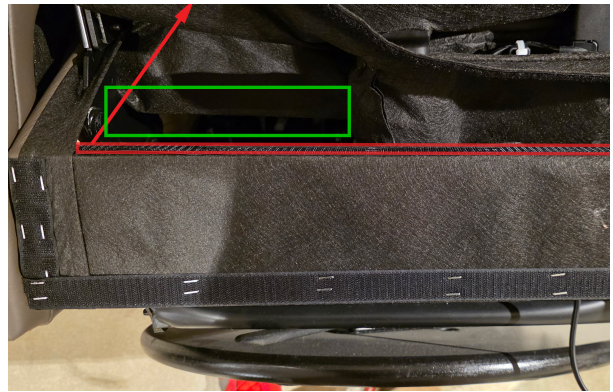


Pull up (red) the dust cover to reveal the battery cavity (green) on the left side.



Complete the circuit by connecting existing wires to battery. If the battery has a charge, your recliner should now have power.



Slide the battery down into the cavity keeping it close to the inside back panel. Push the right battery wing into the mounting plate holster. Then repeat the same for the opposite side. The battery sits slightly proud of the back panel -- it should not move at all once it is fully seated. If you are having trouble, practice mounting the panel before connecting its wires to the chair.

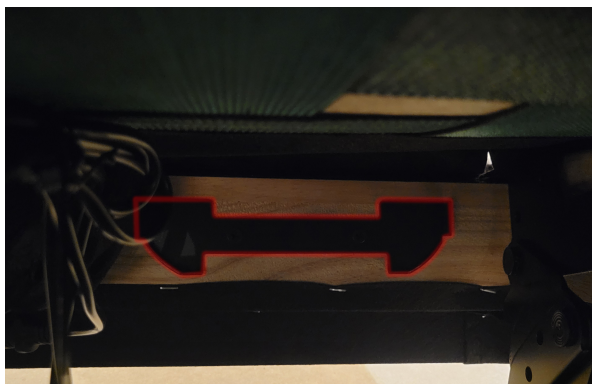

For reference, here is what the battery mounting plate (red highlight) looks like viewed from under the chair.

To charge your Fjords Relax Recliner battery, plug the wire from the bottom of the chair into the power supply given to you when your ordered the chair.

Limoss recommends charging this battery for 6-8 hours every 30 days to continue cycling the battery.

Disconnect from the wall after 8 hours. Do not constantly charge this battery, it can diminish its lifespan.