


LINQ™ 6829

CREDENZA

INSTRUCTION MANUAL

LET'S GET STARTED.

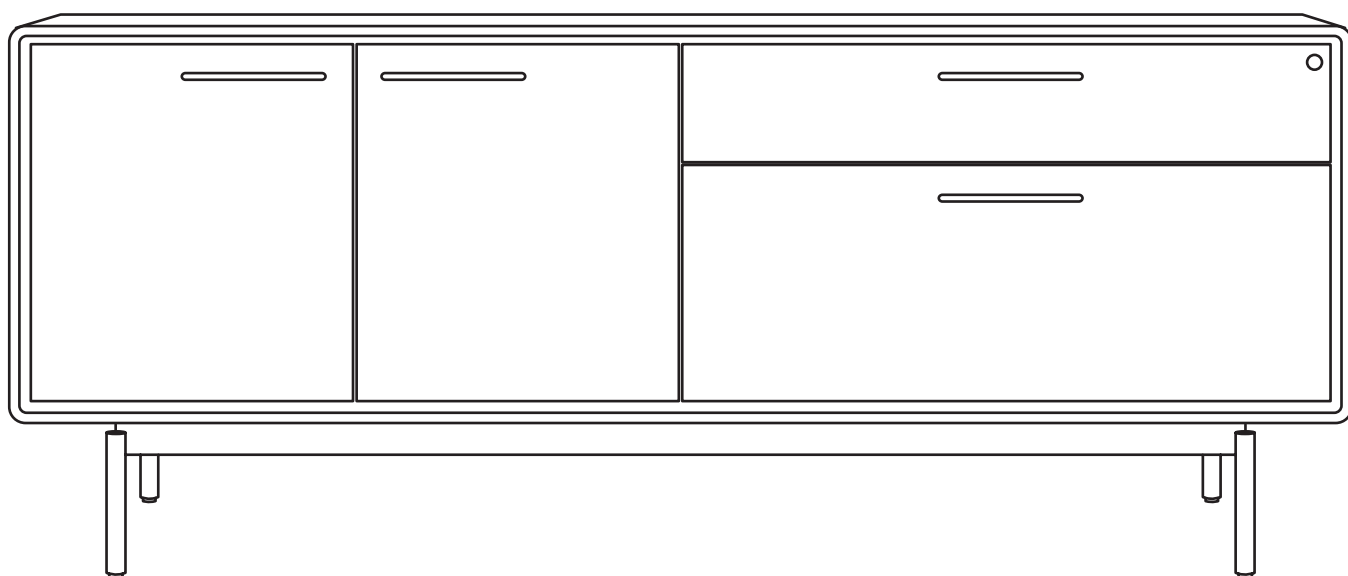

DESIGN MATTHEW WEATHERLY

BDI

BDIUSA.COM



Congratulations on the purchase of your LINQ cabinet from BDI. Your cabinet has been designed to provide a lifetime of enjoyment. This manual will provide assembly instructions and other helpful information to ensure you get the most out of your product. Please save it for future reference.

Your LINQ has been engineered for simple assembly. Please follow these directions carefully to prevent any damage.


Should you need further assistance, contact BDI at customerservice@bdiusa.com.

ENJOY!

HARDWARE AND COMPONENTS


Unpack and identify the parts listed below. The assembly workspace should be a non-marring surface, such as carpet. For missing hardware pieces, please contact BDI Customer Service at customerservice@bdiusa.com. For all other concerns, please contact your BDI retailer.

Do not use power tools for the assembly of this product.




Hex Wrench (T1)

QTY: 1




Leveler Wrench (T2)

QTY: 1




TOOL REQUIRED (NOT INCLUDED)

Phillips Screwdriver




Screw M6 x 80 (H1)

QTY: 6




Screw M6 x 15 (H2)

QTY: 8




Wood Screw (H3)

QTY: 4




Screw M4 x 22 (H4)

QTY: 8




Shelf Pin (H5)

QTY: 4



Screw M6 x 12 (H6)


QTY: 1

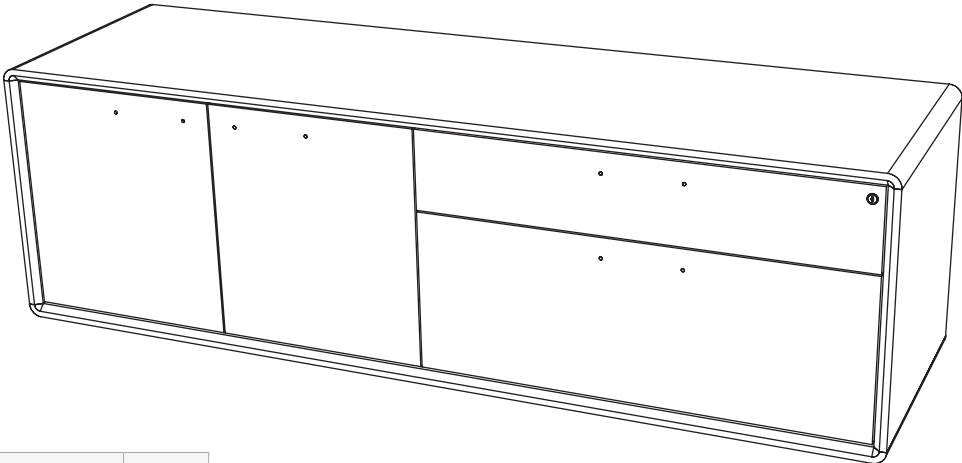

Cabinet (C1)


QTY: 1

HARDWARE AND COMPONENTS

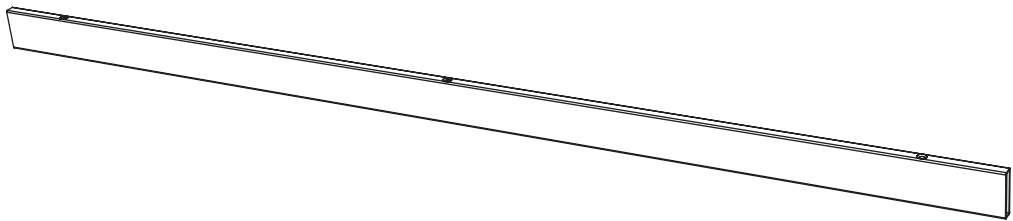


Spanner (C2)

QTY: 2

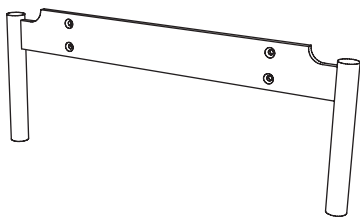

Leg (C3)

QTY: 2

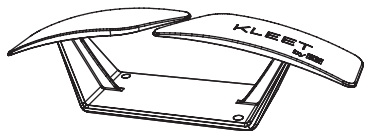


KLEET (C4)

QTY: 2




Pull (C5)

QTY: 4

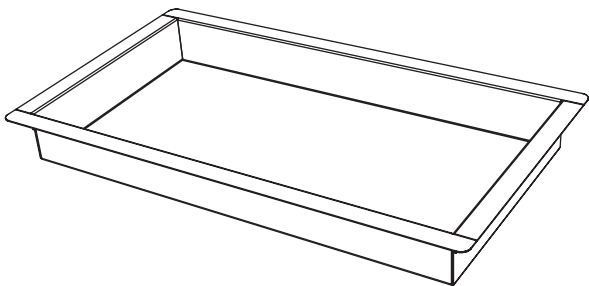

Drawer Tray (C6)

QTY: 1

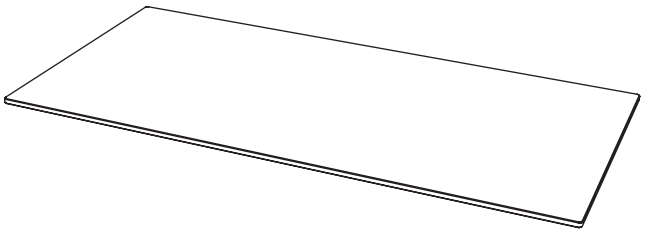

Glass Shelf (C7)

QTY: 1




File Bar (C8)

QTY: 2



File Clip (C9)

QTY: 4



Wall Anchor Strap (C10)

QTY: 1



**HARDWARE REQUIRED
(NOT INCLUDED)**

Drywall Anchor




**HARDWARE REQUIRED
(NOT INCLUDED)**


Drywall Screw

ASSEMBLY

STEP 1. INSTALL SPANNERS

Unpack all components and carefully lay the **Cabinet (C1)** upside down on a soft, non-marring surface such as carpet. Attach the **2 Spanners (C2)** using **6 Screws (H1)**. Tighten with the **Hex Wrench (T1)**, but do not over-tighten.

	HEX WRENCH – T1	QTY 1
	SCREW – H1	QTY 6

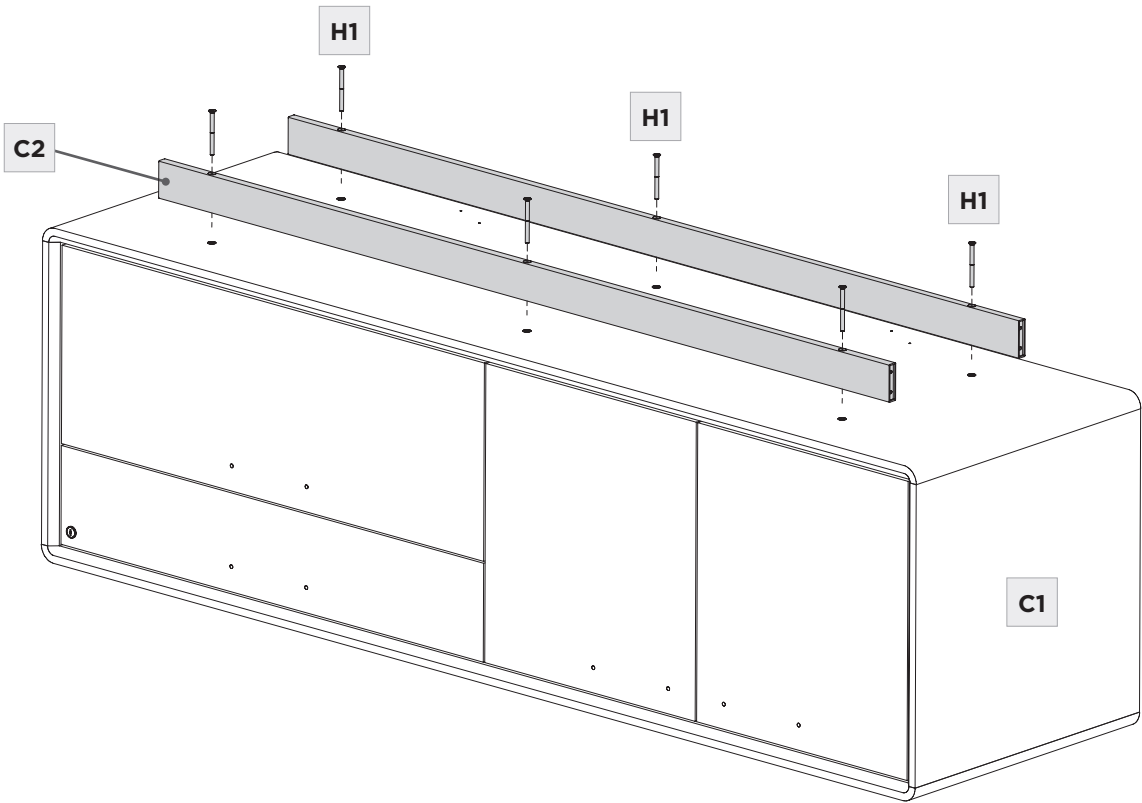


STEP 2. INSTALL LEGS

ASSEMBLY

Attach the **Legs (C3)** to the **Spanners (C2)** using **8 Screws (H2)**. Tighten with **Hex Wrench (T1)**. Once in place, securely tighten all screws of the Spanner and Leg assembly.

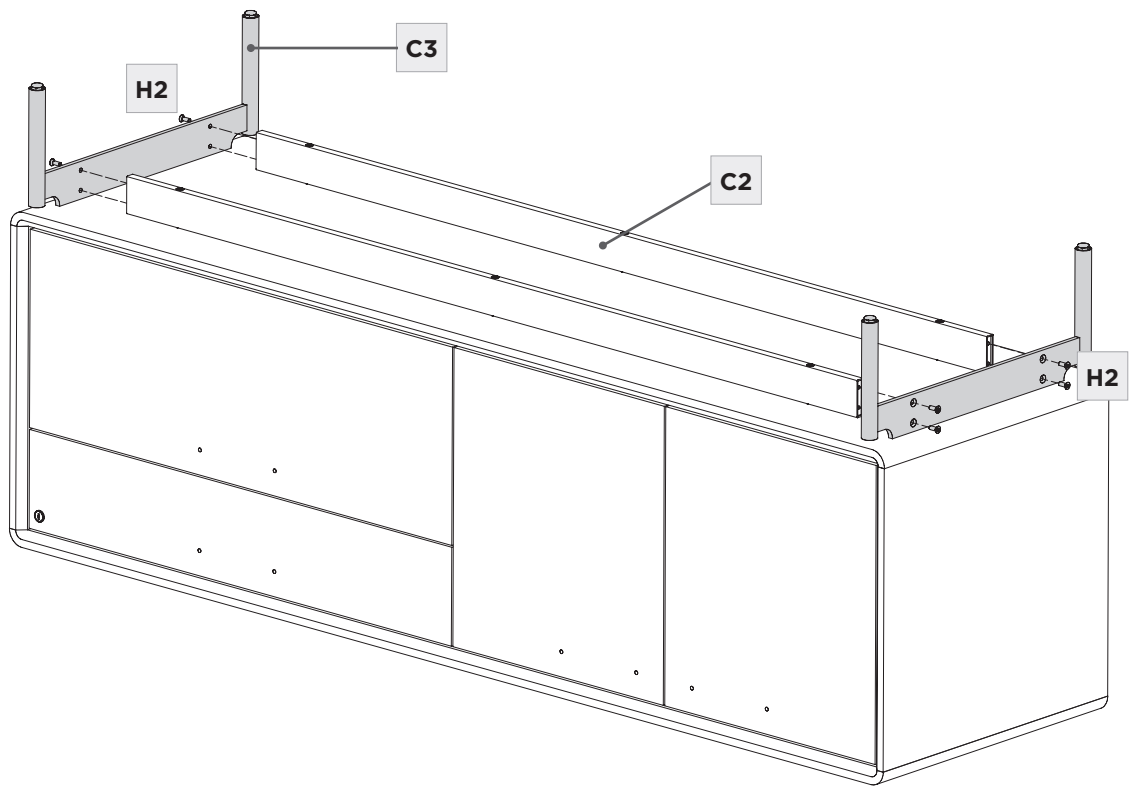

	HEX WRENCH – T1	QTY 1
	SCREW – H2	QTY 8




ASSEMBLY

STEP 3. INSTALL KLEETS

Install the **KLEETS (C4)** to the **Cabinet** using **4 Wood Screws (H3)**. Tighten with **Phillips Screwdriver (not included)**.

	NOT INCLUDED PHILLIPS SCREWDRIVER	QTY 1
	SCREW – H3	QTY 4

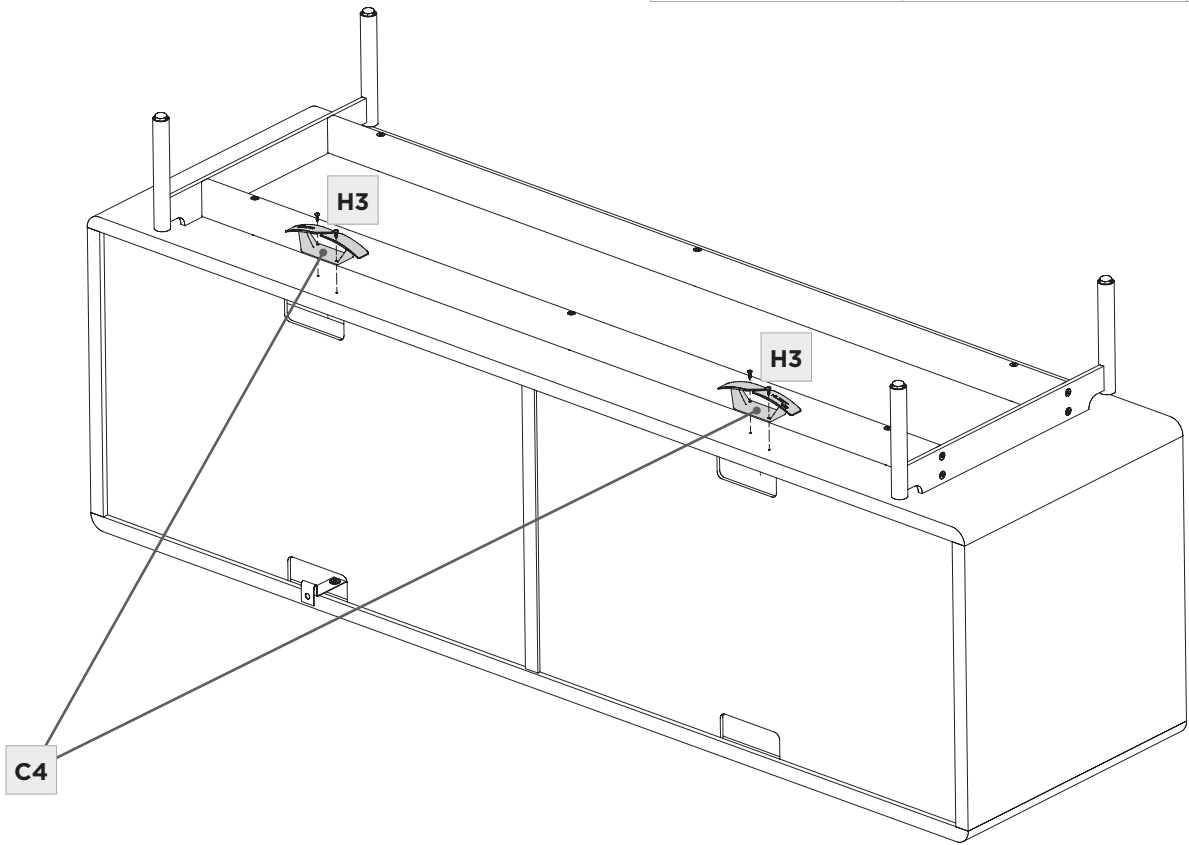




STEP 4. INSTALL PULLS AND GLASS SHELF


ASSEMBLY

With help from another person, carefully flip the cabinet onto its base. Opening the drawers one at a time, install the **Pulls (C5)** using **2 Screws (H4)** per Pull. Tighten with **Phillips Screwdriver (not included)**. Install the **Pulls (C5)** to the doors in the same manner.


Install the **Shelf Pins (H5)** where desired by pressing them into the shelf pin holes in the side compartment. Carefully tilt the **Shelf (C7)** and rest it on the **Shelf Pins (H5)**.

NOTE: Drawers have an interlocking mechanism to prevent both drawers from being opened simultaneously. This greatly reduces the risk of tip-over.

	NOT INCLUDED PHILLIPS SCREWDRIVER	QTY 1
	SCREW – H4	QTY 8
	SHELF PIN – H5	QTY 4

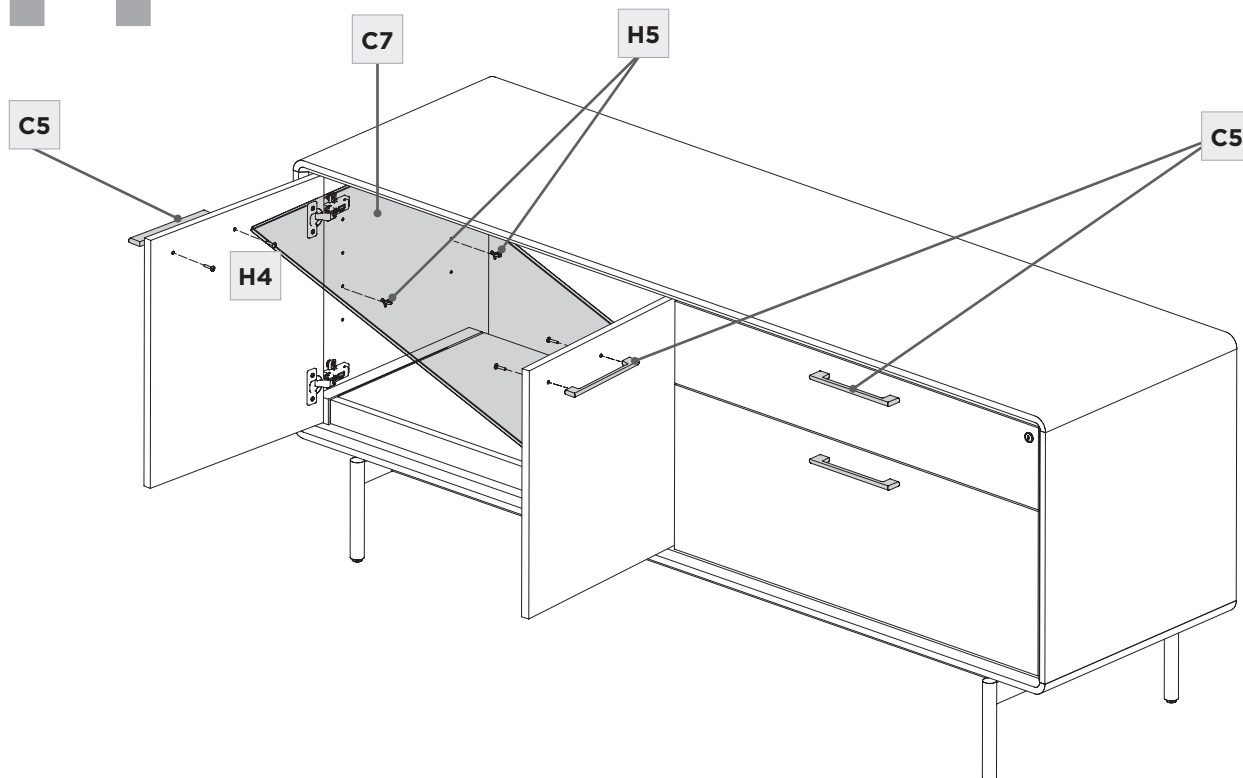

Place the **Drawer Tray (C6)** in the top drawer where desired.

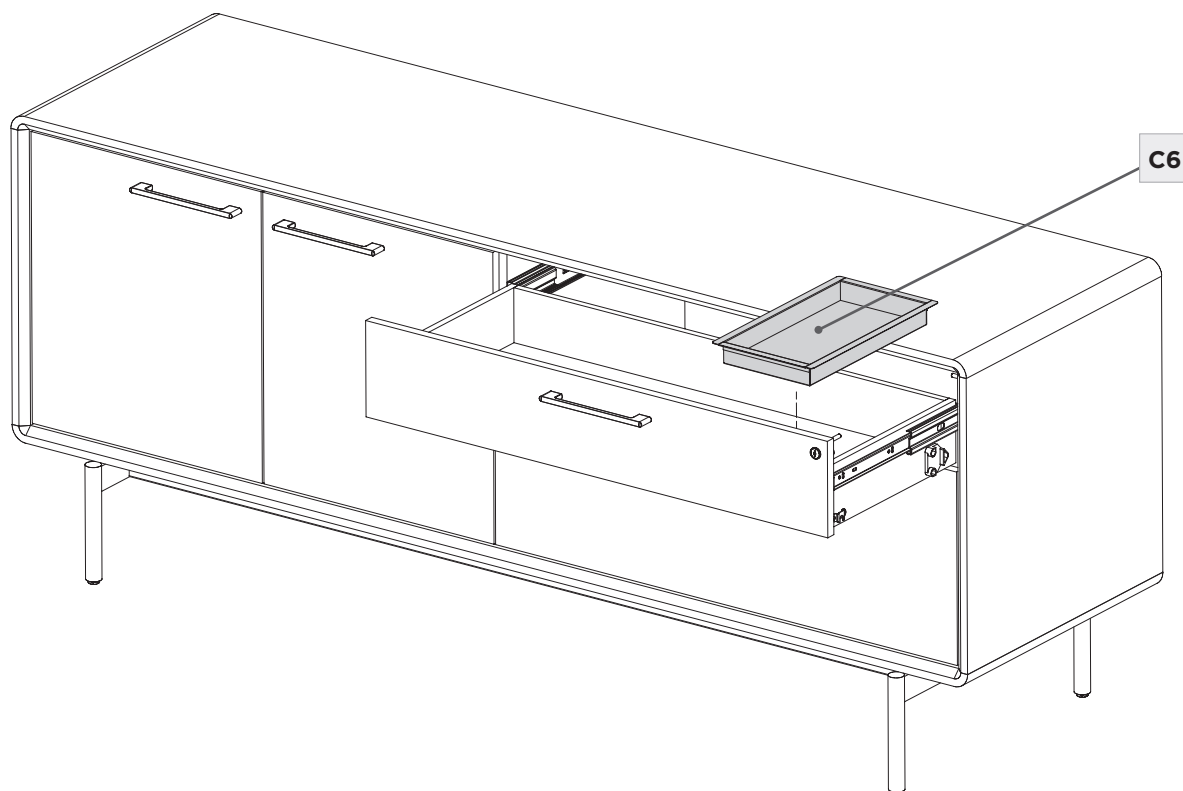


STEP 6. INSTALL FILE HANGING BARS

ASSEMBLY

Press the **File Clips (C9)** onto the ends of the **File Hanging Bars (C8)**.

Place the **File Hanging Bars** in the bottom drawer where desired.

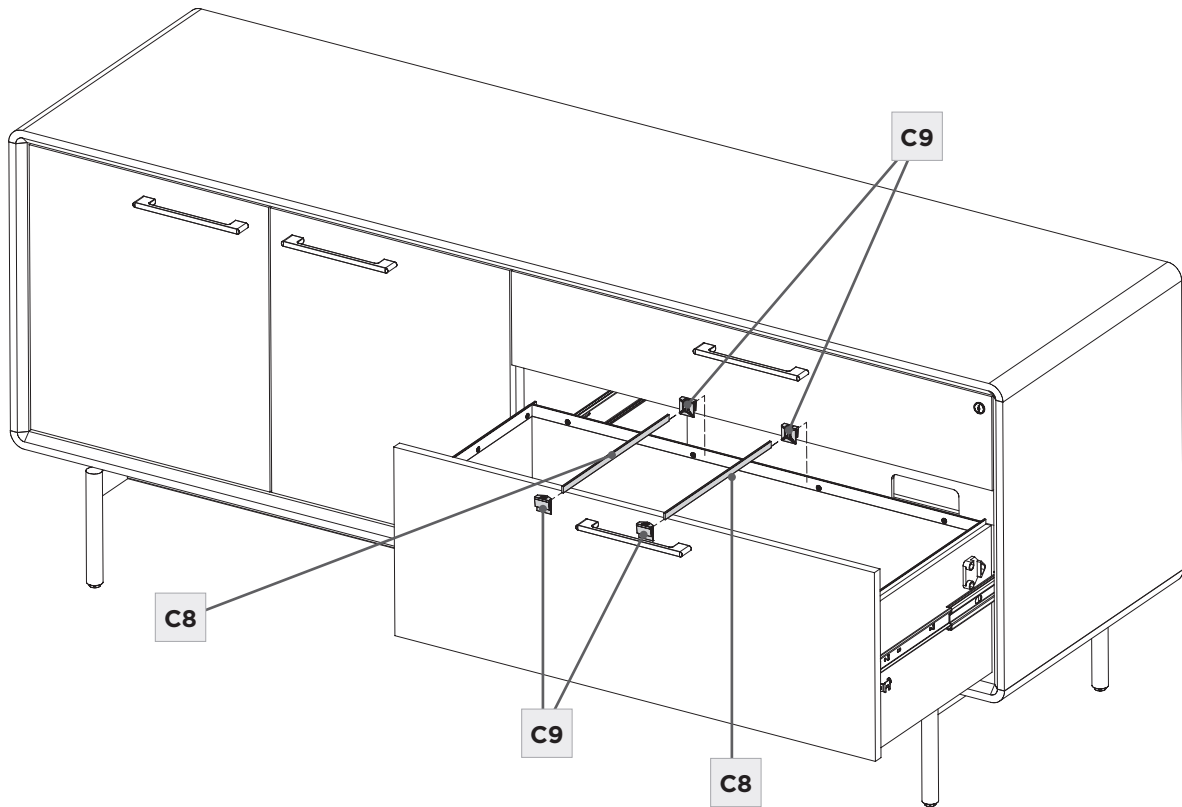







ASSEMBLY

STEP 7. ANCHOR CREDENZA TO THE WALL

It is strongly recommended that you anchor your LINQ Credenza to the wall using the provided **Anchor Strap (C10)**. Measure 28" (711mm) up from the floor and mark the wall as shown. Attach one end of the **Anchor Strap (C10)** to the wall at the marked location with an appropriate **wall anchor and screw with a Phillips Screwdriver (not included)**.


Carefully move your Credenza close to the wall and attach the loose end of the **Anchor Strap (C10)** to the underside of the top panel, in the left compartment of the cabinet, using the **Screw (H6)**. Tighten with **Hex Wrench (T1)**.

	NOT INCLUDED PHILLIPS SCREWDRIVER	QTY 1
	DRYWALL ANCHOR	QTY 1
	DRYWALL SCREW	QTY 1
	HEX WRENCH – T1	QTY 1
	SCREW – H6	QTY 1

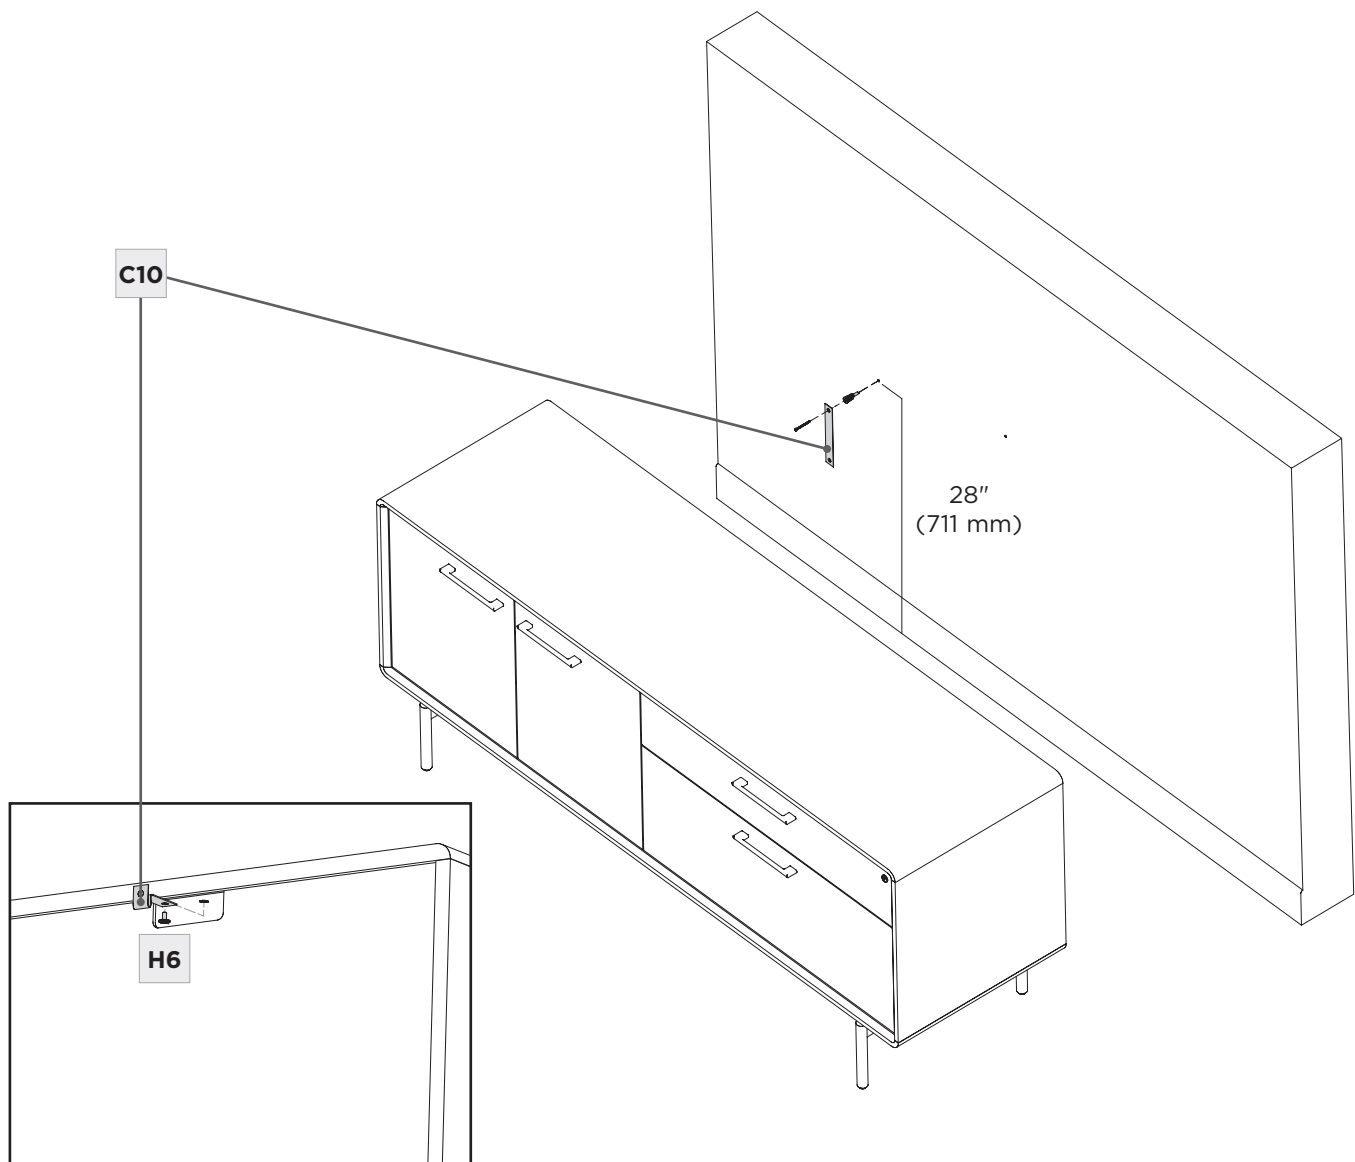

Once the unit is completely assembled and in its final position, adjust the levelers using **Leveler Wrench (T2)**. Using a level (not provided), level your cabinet first side to side and then front to back. If your cabinet is on carpeting, check your front to back level after loading the cabinet and opening the heaviest drawers. This will ensure the cabinet remains level during operation and reduce the risk of tip-over.

	PART/DESCRIPTION	QTY
	LEVELER WRENCH – T2	1

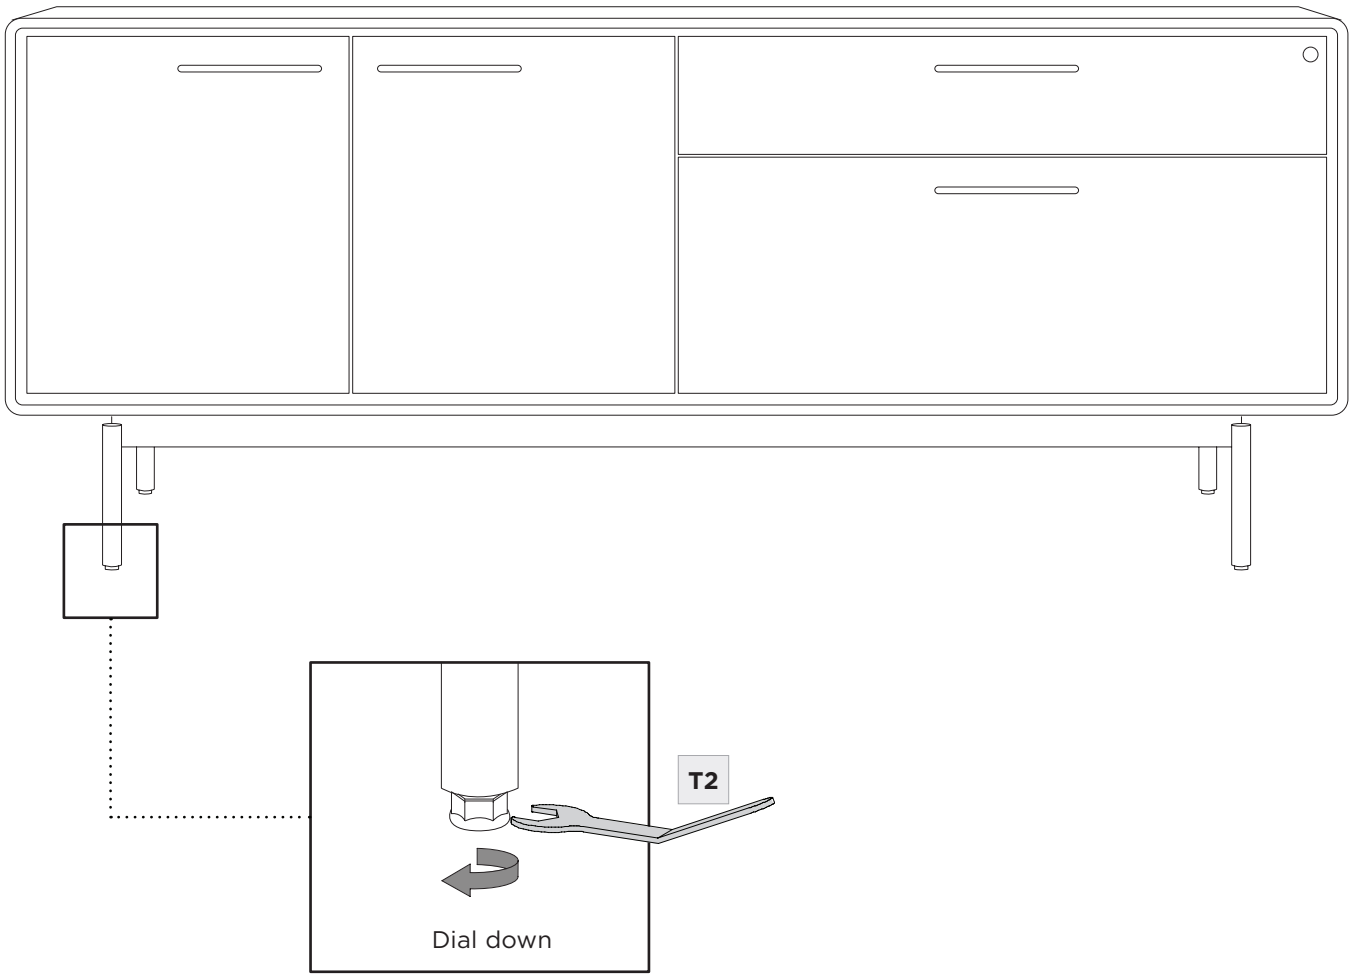

CARE & MAINTENANCE

Your BDI furniture has been constructed with the finest materials, carefully manufactured, and designed to last a lifetime. Regular furniture care will prolong your enjoyment and keep it looking its best. Here are some general tips for taking care of BDI furniture. Your surfaces may vary.

GLASS

Glass surfaces are maintained using household glass cleaner and a paper towel or cloth.

SATIN-ETCHED GLASS

This uniquely smooth-to-the-touch glass surface can be regularly maintained using household glass cleaner and a paper towel or cloth.

A 'Magic Eraser' removes minor scratches or scuffs not eliminated using a paper towel or cloth. 'Magic Eraser' is a melamine foam product available at any grocery store or home improvement center. Dampen the entire glass surface and the Magic Eraser, then rub the whole surface in broad, even strokes using moderate pressure. Clean and dry the surface with a paper towel. Check for results and repeat as necessary. Any scratches or scuffing not eliminated by one of the above methods can often be addressed by 'refreshing' the glass. This process should not be required more than once per 6-12 months. See this brief video for the simple method: www.bdiusa.com/glass

WOOD

Wood surfaces should be cleaned with a slightly damp (not saturated) cloth or paper towel. Do not use glass cleaner on wood. If moisture remains, dry the surface with another cloth. If needed, a gentle, non-abrasive cleanser may be used, but wipe away all cleaner residue and dry the surface with a cloth.

BDI's wood finishes feature natural hardwood solids and veneers. Wood is a product of nature and—unlike man-made materials that can be manufactured to strict and consistent specifications—has natural imperfections that are part of its appeal and character. Every piece of wood differs from every other, even when coming from the very same tree. As such, grain, texture, and tone variation should be expected from one panel or piece of furniture to the next.

While BDI's stained wood finishes are stable in tone & appearance, all finishes are subject to some degree of discoloration with prolonged exposure to direct sunlight. Please avoid positioning your BDI cabinet in any area with ample direct sunlight. To learn more about the features of natural wood, visit www.bdiusa.com/wood

METAL, PORCELAIN, & PAINTED SURFACES

Surfaces should be cleaned with a slightly damp (not saturated) cloth or paper towel. If moisture remains, dry the surface with another cloth. If needed, a gentle, non-abrasive cleanser may be used, but be sure to wipe away all cleaner residue and dry the surface with a cloth.

WARRANTY

BDI warrants to the original purchaser that for the below-stated warranty term, BDI will replace any product, part, or component covered by this warranty that fails under normal use as a result of a defect in material or workmanship. The decision to replace a complete product versus the part or component in question will be at BDI's sole discretion.

Residential Use: BDI Furnishings carry warranty coverage for three (3) years from the date of product delivery, as shown on your sales receipt/documentation. Select chairs carry coverage for five (5) years from the date of product delivery.


Commercial Use: BDI Furnishings carry warranty coverage for one (1) year from the date of product delivery, as shown on your sales receipt/documentation. Select chairs carry coverage for five (5) years from the date of the product delivery, based on an 8-hour daily use pattern.

BDI reserves the right to refine or update its warranty from time to time. See the complete and latest warranty document at www.bdiusa.com/warranty.

PRODUCT REGISTRATION

Registering your new BDI product allows us to send you important product updates, service information, and helpful hints related to your BDI products.

Register today, and you will be **entered to win free a BINK table** from BDI: www.bdiusa.com/register

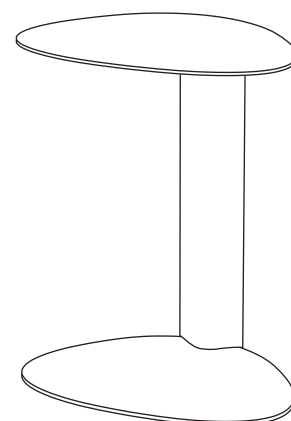



These distinctive product configurations are protected by US and international patents, trade dress, and/or copyright laws. LINQ & BDI are trademarks of Becker Designed, Inc. All rights reserved. ©2024, BDI | V.05.10.2024

Made in Vietnam.